New

Swing Joint

½”, ¾”, 1”, 1¼” & 1½”

Swing Joints are a versatile, durable and efficient solution for providing flexibility in piping systems in agricultural, turf, industrial and chemical applications. Built to deliver exceptional performance in challenging environments, these swing joint ensures smooth operation, easy sprinkler height adjustments, and long-term reliability. The new 3 & 5-elbow configurations offer unmatched adaptability for rolling terrains, hillsides, and areas with difficult watering conditions.



3-Elbow 5-Elbow

HIGHLIGHTS

- **Smooth and Reliable movement:** Double O-rings and precision-engineered components ensure smooth operation and easy assembly.
- **Versatile Thread Options:** Available in BSP / NPT to suit various global requirements.
- **Maximum Adaptability:** Swings on both ends provide flexibility for diverse irrigation setups and precise sprinkler placement.
- **Cost-Effective Maintenance:** Significantly reduces labor costs for maintenance.
- **Grade Alignment:** Allows rotors to be positioned both vertically and horizontally for exact alignment with terrain and turf height.


APPLICATIONS

- Agricultural, Industrial, Chemical, Turf, Pool & Spa applications.

TECHNICAL DATA

Size	½”	¾”	1”	1¼”	1½”
Elbows	–	–	3 & 5	3 & 5	3 & 5
Max. operating pressure	6 Bar		21.6 Bar		
Material	PP	PP	PVC	PVC	PVC

Product Dimensions		
Size	A	B
	cm	cm
½”	30	4
¾”	30	4
1”	29	10
1¼”	29	11
1½”	29	11

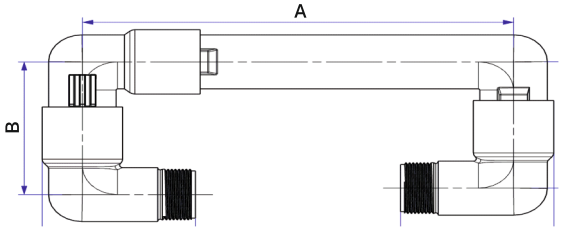

Creating a Green World®