

# HT - 47G (Mariner)

2½" Water Gun



Imported

## Features


- Available in 2½" BSP/NPT Female Thread Connection.
- Both Part Circle & Full Circle adjustments.
- Adjustable Jet breaker to provide uniform distribution.
- Equipped with interchangeable nozzles of different sizes for various applications.
- Inner rotating system supported by stainless steel ball bearing to guarantee no strain and no oxidation due to humidity.

## Application

- Sports Fields, Golf Courses
- Dust Suppression, Green Pastures, Big Parks and Gardens

# HT - 43G (Skipper)

1½" Water Gun

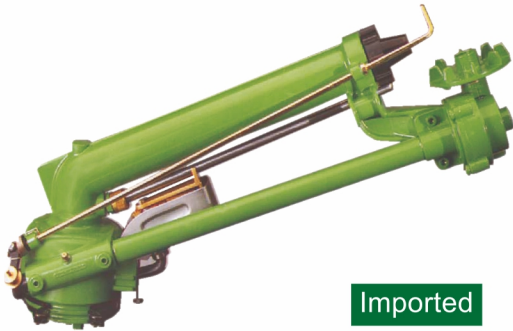

Imported

## Features

- Available in 1½" BSP/NPT Female Thread Connection
- Both Part Circle & Full Circle adjustments
- Adjustable Jet breaker to provide uniform distribution
- Equipped with interchangeable nozzles of different sizes for various applications
- Inner rotating system supported by stainless steel ball bearing to guarantee no strain and no oxidation due to humidity

## Application

- Sports Fields, Golf Courses
- Dust Suppression, Green Pastures
- Suitable in Landscape / Horticulture in Big Parks and Gardens

### Performance Data (Mariner)

Nozzle (mm)	Pressure (kg/cm <sup>2</sup> )	Radius (mtr)	Discharge (ltr/min)	Irrigated Area (mtr <sup>2</sup> )	Precipitation Rate (mm/h)
28	3.0	45	917	6361	8.6
	4.0	49	1061	7539	8.4
	5.0	52	1186	8494	8.3
	6.0	55	1300	9498	8.2
≈ 30	4.0	50	1207	7853	9.2
	5.0	54	1350	9156	8.8
	6.0	57	1479	10200	8.7
	7.0	61	1594	11683	9.6
32	4.0	52	1361	8494	9.6
	5.0	56	1522	9847	9.3
	6.0	59	1668	10930	9.1
	7.0	62	1798	12070	8.9

\* Performance is based on ideal conditions of Temperature, Wind Velocity and Humidity.  
 ≈ Standard Nozzle Size

Manufactured as per ISO-7749-1&2 specifications

### Performance Data (Skipper)

Nozzle (mm)	Pressure (kg/cm <sup>2</sup> )	Radius (mtr)	Discharge (ltr/min)	Irrigated Area (mtr <sup>2</sup> )	Precipitation Rate (mm/h)
14x6	2.0	24	195	1808	8.5
	3.0	27	251	1289	6.5
	4.0	30	290	2826	6.2
	5.0	33	324	3419	5.7
	6.0	36	354	4012	5.2
≈ 16x6	2.0	26	2857	2123	7.2
	3.0	29	315	2640	7.1
	4.0	32	364	2217	6.8
	5.0	35	406	3846	6.3
	6.0	38	435	4479	5.8
18x6	2.0	28	318	2641	7.7
	3.0	31	404	3017	8.0
	4.0	34	471	3629	7.8
	5.0	37	521	4298	7.3
	6.0	40	564	4926	6.8

\* Performance is based on ideal conditions of Temperature, Wind Velocity and Humidity.

≈ Standard Nozzle Size

Manufactured as per ISO-7749-1&2 specifications



E-mail: [contactus@automatworld.com](mailto:contactus@automatworld.com)  
 Website: [www.automatworld.com](http://www.automatworld.com)

Creating a Green World™