

# Aquatuff

HT - 205 (Agristand)

IS : 14605:1998



Part - 1  
CML : 8300110496



## Features & Specifications

- Sturdy Structure and User Friendly
- $\frac{3}{8}$ " &  $\frac{1}{2}$ " male threaded connection
- Insect proof Pop-up Swivel
- Range of operating Pressure: 1.5 - 2.5kg/cm<sup>2</sup>
- Flow Rate Range: 175 - 450 LPH
- Recommended Spacing: 4x4m, 5x5m & 6x6m


## Performance Chart (High Trajectory Angle)

Nozzle Colour	Size (mm)	Pressure kg/cm <sup>2</sup>	Flow (LPH)	Dia. (m)	Precipitation Rate (mm/hr)/Spacings (m)		
					4x4	5x5	6x6
Blue	1.98	1.5	175	10.6	10.9	7.0	4.9
		2	202	11.0	12.6	8.1	5.6
		2.5	226	11.5	14.1	9.0	6.3
Red	2.4	1.5	251	10.6	15.7	10.0	7.0
		2	290	11.7	18.1	11.6	8.1
		2.5	324	12.2	20.3	13.0	9.0
White	2.8	1.5	350	12.0	21.9	14.0	9.7
		2	404	12.5	25.3	16.2	11.2
		2.5	452	12.8	28.3	18.1	12.6

\* Tested at 1m high above ground Color Code Distribution Uniformity

CDU < 85%	85% ≤ CDU < 88%	89% ≤ CDU < 92%	CDU > 92%
-----------	-----------------	-----------------	-----------

## Connection Available

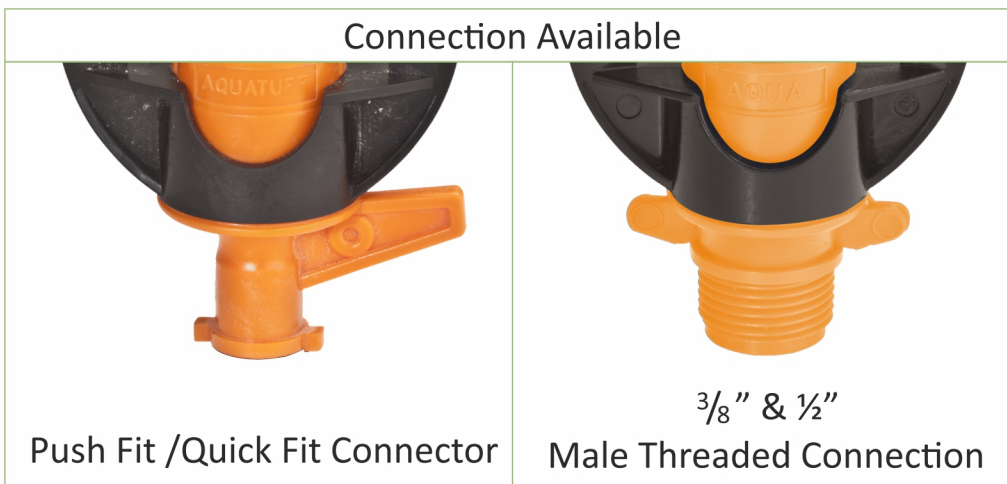

Push Fit /Quick Fit Connector

$\frac{3}{8}$ " &  $\frac{1}{2}$ "  
Male Threaded Connection



E-mail: [contactus@automatworld.com](mailto:contactus@automatworld.com)  
Website: [www.automatworld.com](http://www.automatworld.com)

Creating a Green World™