

AUTOMAT COMPACT VALVES

1/2", 3/4", 1", 1 1/4", 1 1/2" & 2"

Designed to excel in restricted spaces, these valves deliver reliable, long-term performance within a streamlined, space-saving profile.




Compact & Durable Construction

Precision moulded valves manufactured using virgin high-quality Unplasticized Polyvinyl Chloride (UPVC) for excellent long-life performance.




Smooth & User-Friendly Operation

Precision moulded valves manufactured using virgin high-quality Unplasticized Polyvinyl Chloride (UPVC) for excellent long-life performance.



Leak Proof

100% hydro tested & Manufactured with advanced engineered TPE seals to ensure 100% leak-free sealing.



UV Stabilized & Corrosion Resistant

Built to withstand harsh sunlight and corrosive environments, ensuring long service life.

Premier Choice For Residential & Commercial Water Systems

AUTOMAT IRRIGATION


www.automatworld.com

TECHNICAL SPECIFICATIONS

- Ideal for application in temperature below 55°C.
- Pressure Rating : PN 10
- Available in solvent-glued socket ends-compatible with ASTM standards.

APPLICATIONS

- **Residential and Commercial Plumbing** : Engineered for cold water residential and commercial water systems, water tanks & overhead tank inlet/outlet.
- RO plants & water filtration units.
- Garden taps & Landscape irrigation.

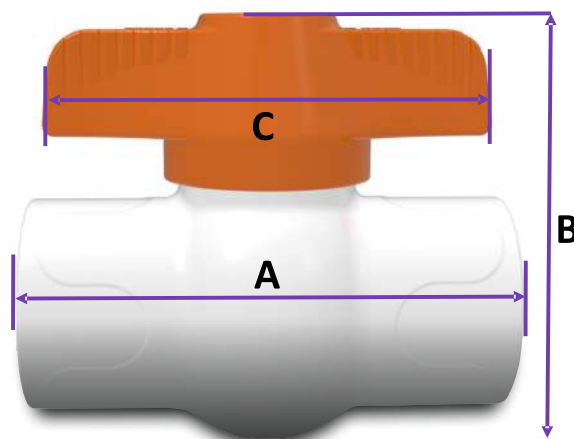


Dimension in mm

Model No.	D	DN	PN	A	B	C
HT-661BVWS	½"	15	10	69.5	55	60.5
HT-662BVWS	¾"	20	10	84.5	70.5	70.5
HT-663BVWS	1"	25	10	96	88	89
HT-664BVWS	1¼"	32	10	112	95.5	110
HT-665BVWS	1½"	40	10	120	109	109
HT-666BVWS	2"	50	10	132	123.5	120.5

WS: White Body with Short Handle

Head Loss Chart

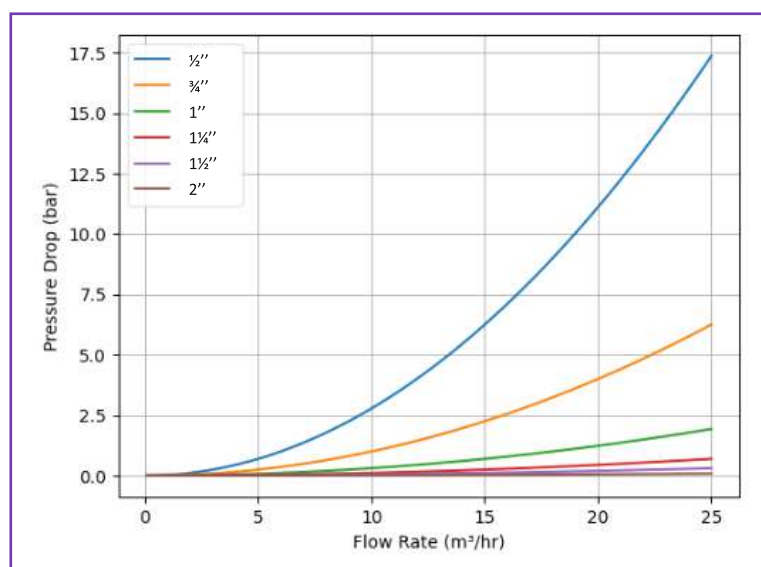

Components

